



Air Conditioning & Heating



1½ TO 5 Ton

# PRODUCT SPECIFICATIONS



## GSC13 13 SEER HIGH-EFFICIENCY SPLIT SYSTEM AIR CONDITIONER



The GSC13 Split System Air Conditioner features the unique Goodman® sound control top designed for quiet operation. In addition, the unit has an attractive louvered metal guard that protects the coil from damage plus a powder-paint finish that provides premium durability and improved UV protection.

### Standard Features

- Energy-efficiency compressor
- Quiet condenser fan system
- Factory-installed liquid line filter dryer
- Copper tube/aluminum fin coil
- R-22 refrigerant-charged for 15' of refrigerant lines
- Brass liquid and suction service valves with sweat connections
- Contactor with lug connections
- Ground lug connection
- ARI Certified; ETL Listed

### Air Handler and Coil Compatibilities

- ARPF, ADPF, ARUF, AEPF — versatile upflow, horizontal or downflow air handlers; may be located in closets, utility rooms, attics, or basements
- AWUF vertical wall-mounted electric heat air handlers
- ACNF ceiling-mounted electric heat air handlers
- MBR/MBE modular blower
- CA, CH, and CSCF indoor coils

### Cabinet Features


- Unique Goodman® sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds

### Accessories

- Anchor Bracket Kit
- Anti-Short Cycle Kit
- Hard-start Kit
- Freeze Protection Kit
- Liquid Line Solenoid Kit
- Outdoor Thermostat



**NOMENCLATURE**

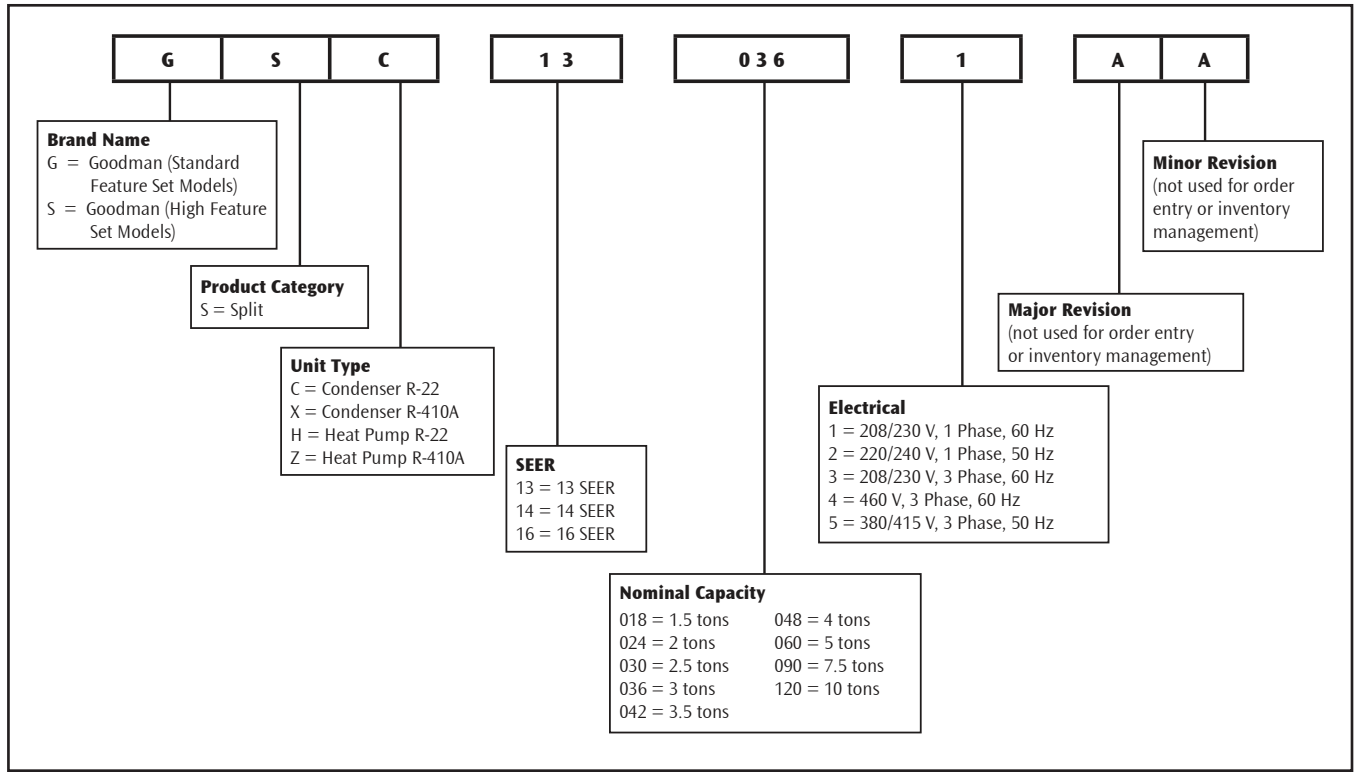

**SPECIFICATIONS**

	GSC13 0181AA	GSC13 0241A	GSC13 0241C	GSC13 0301A	GSC13 0361A	GSC13 0361B	GSC13 0361C	GSC13 0361D
<b>Cooling Capacities</b>								
Nominal Cooling (BTU/h)	18,000	24000	24,000	30,000	36,000	36,000	36,000	36,000
Decibels	76	76	76	76	76	76	76	76
<b>Compressor</b>								
RLA	6.2	7.7	10.4	9.7	12.2	12.5	11.2	12.2
LRA	35.0	40.0	54.0	49.0	73.0	73.0	68.0	73.0
<b>Condenser Fan Motor</b>								
Horsepower	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
FLA	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>Refrigeration System</b>								
<b>Refrigerant Line Size <sup>1</sup></b>								
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
<b>Refrigerant Connection Size</b>								
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	95	99	102	123	125	125	120	125
Shipped with Orifice Size	0.055	--	--	--	0.074	0.071	0.074	--
<b>Electrical Data</b>								
AC Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
Hz / Phase	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1
Min. Circuit Ampacity <sup>2</sup>	9.3	11.2	14.6	13.6	16.8	17.1	15.5	16.8
Max. Overcurrent Device <sup>3</sup>	15	15	20	20	20	30	20	25
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Ship Weight (lbs)	173	195	182	195	199	205	214	199

<sup>1</sup> Tested and rated in accordance with ARI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**Notes**

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

# PRODUCT SPECIFICATIONS

## SPECIFICATIONS (CONT.)

	GSC13 0361E	GSC13 0363A	GSC13 0421AA	GSC13 0481AA	GSC13 0483A	GSC13 0484AA	GSC13 0601B	GSC13 0603A	GSC13 0604A
<b>Cooling Capacities</b>									
Nominal Cooling (BTU/h)	36,000	36,000	42,000	48,000	48,000	48,000	57,000	57,000	57,000
Decibels	76	76	76	76	76	76	76	76	76
<b>Compressor</b>									
RLA	11.2	9.0	14.7	17.9	12.4	5.8	25.0	17.3	6.7
LRA	68.0	65.5	77.0	104.0	88.0	44.0	148.0	123.0	49.5
<b>Condenser Fan Motor</b>									
Horsepower	1/6	1/6	¼	¼	¼	¼	1/6	1/6	1/6
FLA	1.5	1.5	1.6	1.6	1.6	0.8	1.1	1.1	0.6
<b>Refrigeration System</b>									
Refrigerant Line Size <sup>1</sup>									
Liquid Line Size ("O.D.)	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Suction Line Size ("O.D.)	7/8"	7/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size									
Liquid Valve Size ("O.D.)	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Suction Valve Size ("O.D.)	¾"	¾"	7/8"	7/8"	7/8"	7/8"	7/8"	7/8"	7/8"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	120	125	143	158	158	158	175	175	175
Shipped with Orifice Size	--	--	--	0.082	0.082	0.082	--	--	--
<b>Electrical Data</b>									
AC Volts	208/230	208/230	208/230	208/230	208/230	460	208/230	208/230	460
Hz / Phase	60 Hz/1	60 Hz/3	60 Hz/1	60 Hz/1	60 Hz/3	60 Hz/3	60 Hz/1	60 Hz/3	60 Hz/3
Min. Circuit Ampacity <sup>2</sup>	15.5	12.7	20	24	17.2	8.0	32.3	22.7	9.0
Max. Overcurrent Device <sup>3</sup>	25	20	30	40	20	15	50	40	15
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	414/506	197/253	197/253	414/506
Electrical Conduit Size	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"	½" or ¾"
Ship Weight (lbs)	214	198	199	207	207	207	242	242	242

<sup>1</sup> Tested and rated in accordance with ARI Standard 210/240


<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

### Notes

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

DIMENSIONS

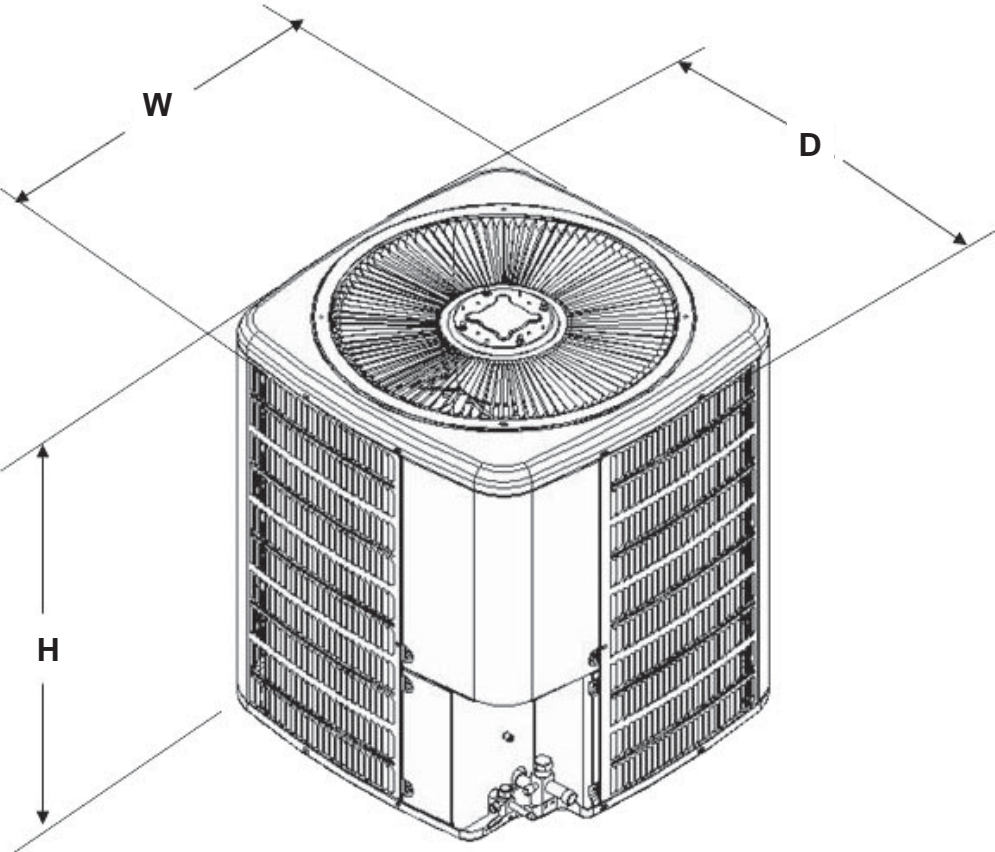

Model	Dimensions W x D x H
GSC130181A	26 x 26 x 29 <sup>3</sup> / <sub>4</sub>
GSC130241A	26 x 26 x 34 <sup>3</sup> / <sub>4</sub>
GSC130241C	26 x 26 x 34 <sup>3</sup> / <sub>4</sub>
GSC130301A	29 x 29 x 34 <sup>3</sup> / <sub>4</sub>
GSC130361A	29 x 29 x 34 <sup>1</sup> / <sub>4</sub>
GSC130361BA	29 x 29 x 34 <sup>3</sup> / <sub>4</sub>
GSC130361CA	29 x 29 x 34 <sup>3</sup> / <sub>4</sub>
GSC130361D	29 x 29 x 34 <sup>3</sup> / <sub>4</sub>
GSC130361E	29 x 29 x 34 <sup>3</sup> / <sub>4</sub>
GSC130363A	29 x 29 x 34 <sup>1</sup> / <sub>4</sub>
GSC130421A	29 x 29 x 34 <sup>1</sup> / <sub>4</sub>
GSC130481A	29 x 29 x 38 <sup>1</sup> / <sub>4</sub>
GSC130483A	29 x 29 x 38 <sup>1</sup> / <sub>4</sub>
GSC130484A	29 x 29 x 38 <sup>1</sup> / <sub>4</sub>
GSC130601B	35 <sup>1</sup> / <sub>2</sub> x 35 <sup>1</sup> / <sub>2</sub> x 38 <sup>1</sup> / <sub>4</sub>
GSC130603A	35 <sup>1</sup> / <sub>2</sub> x 35 <sup>1</sup> / <sub>2</sub> x 38 <sup>1</sup> / <sub>4</sub>
GSC130604A	35 <sup>1</sup> / <sub>2</sub> x 35 <sup>1</sup> / <sub>2</sub> x 38 <sup>1</sup> / <sub>4</sub>

PERFORMANCE RATINGS

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0181A*	AC18-XX		18,000	12,800	13.0	11.5	728986
	ACNF018-XX1A*		18,000	12,800	13.0	11.5	728989
	ADPF182416A*		19,000	13,500	13.0	11.5	1038100
	ADPF18241A*		19,000	13,500	13.0	11.5	1038136
	ADPF18241B*		19,000	13,500	13.0	11.5	1062382
	AEPF183016A*		19,000	13,500	14.0	12.2	1038101
	AEPF183016B*		19,000	13,500	14.0	12.2	1277805
	AEPF18301A*		19,000	13,500	14.0	12.2	734461
	AEPT030-00*-1*		19,000	13,500	14.0	12.2	734428
	ARPF036-00B-1*		19,000	13,500	13.0	11.5	734445
	ARPF182416A*		19,000	13,500	13.0	11.5	1038102
	ARPF18241A*		19,000	13,500	13.0	11.5	734443
	ARPF18241B*		19,000	13,500	13.0	11.5	1062384
	ARPT032-00*-1*		19,000	13,500	13.0	11.5	734466
	ARUF032-00*-1*		19,000	13,500	13.0	11.5	734435
	ARUF182416A*		19,000	13,500	13.0	11.5	1038103
	ARUF18241A*		19,000	13,500	13.0	11.5	734444
	ARUF18241B*		19,000	13,500	13.0	11.5	1062385
	ASPF183016A*		19,000	13,500	14.0	12.2	1291666
	AWB24-XX		18,000	12,800	13.0	11.5	728988
	AWUF18XX1A*		18,000	12,800	13.0	11.5	728987
	AWUF18XX1B*		18,000	12,800	13.0	11.5	1279576
	CA*F030*2*	G*V80704B**	19,000	13,500	14.0	12.2	734458
	CA*F030*2*	G*V90704C**	19,000	13,500	14.0	12.2	734433
	CA*F030*2*	G*V950453B**	19,000	13,500	14.0	12.2	734421
	CA*F030*2*+EEP		19,000	13,500	13.0	11.5	734419
	CA*F030*2*	MBE1200	19,000	13,500	14.0	12.2	734423
	CA*F1824*6A*	G*E80704B**	19,000	13,500	14.0	12.2	1259436
	CA*F1824*6A*	G*V80704B**	19,000	13,500	14.0	12.2	734425
	CA*F1824*6A*	G*V90704C**	19,000	13,500	14.0	12.2	734462
	CA*F1824*6A*	G*V950453B**	19,000	13,500	14.0	12.2	734460
	CA*F1824*6A*	G*V950704C**	19,000	13,500	14.0	12.2	734451
	CA*F1824*6A*+EEP		19,000	13,500	13.0	11.5	734464
	CA*F1824*6A	MBE1200	19,000	13,500	14.0	12.2	734447
	CA*F1824*6B*	G*V80704B**	19,000	13,500	14.0	12.2	1347003
	CA*F1824*6B*	G*V90704C**	19,000	13,500	14.0	12.2	1347004
	CA*F1824*6B*	G*V950453B**	19,000	13,500	14.0	12.2	1347005
	CA*F1824*6B*	G*V950704C**	19,000	13,500	14.0	12.2	1347002
	CA*F1824*6B*	G*V950704C**	19,000	13,500	14.0	12.2	1347006
	CA*F1824*6B*+EEP		19,000	13,500	13.0	11.5	1347007
	CA*F1824*6B*	MBE1200**-1	19,000	13,500	14.0	12.2	1347162
	CA*F3030*6A*	G*V950704C**	19,000	13,500	14.0	12.2	734456
CA*F3030*6B*	G*V950704C**	19,000	13,500	14.0	12.2	1347008	
CHPF030A2*+EEP		19,000	13,500	13.0	11.5	734465	
CHPF036B2*+EEP+TXV		18,000	12,700	13.0	11.5	1069406	

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

**Notes:**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP: Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0181A* (cont.0)	CHPF042B2*	G*V80704B**	19,600	13,500	14.0	12.2	734427
	CHPF042B2*	G*V90704C**	19,600	13,500	14.0	12.2	734420
	CHPF042B2*	G*V950453B**	19,600	13,500	14.0	12.2	734437
	CHPF042B2*+EEP		19,000	13,500	13.0	11.5	879223
	CHPF1824A6A*+EEP		19,000	13,500	13.0	11.5	734429
	CHPF1824A6B*+EEP		19,000	13,500	13.0	11.5	1330543
	CHPF2430B6A*	G*E80704B**	19,600	13,500	14.0	12.2	1259440
	CHPF2430B6A*	G*V80704B**	19,600	13,500	14.0	12.2	734439
	CHPF2430B6A*	G*V90704C**	19,600	13,500	14.0	12.2	734432
	CHPF2430B6A*	G*V950453B**	19,600	13,500	14.0	12.2	736261
	CHPF2430B6A*+EEP		19,000	13,500	13.0	11.5	879233
	CHPF2430B6A*	MBE1200**-1	19,000	13,500	14.0	12.2	1088815
	CHPF2430B6B*	G*E80704B**	19,600	13,500	14.0	12.2	1347543
	CHPF2430B6B*	G*V90704C**	19,600	13,500	14.0	12.2	1330545
	CHPF2430B6B*	G*V950453B**	19,600	13,500	14.0	12.2	1330544
	CHPF2430B6B*	G*V950453B**	19,600	13,500	14.0	12.2	1330546
	CHPF2430B6B*+EEP		19,000	13,500	13.0	11.5	1330547
	CHPF2430B6B*	MBE1200**-1A*	19,000	13,500	14.0	12.2	1330457
	CSCF1824N6A*	G*E80704B**	19,000	13,500	14.0	12.2	1259441
	CSCF1824N6A*	G*V80704B**	19,000	13,500	14.0	12.2	734441
	CSCF1824N6A*	G*V90704C**	19,000	13,500	14.0	12.2	734457
	CSCF1824N6A*	G*V950453B**	19,000	13,500	14.0	12.2	736247
	CSCF1824N6A*+EEP		19,000	13,500	13.0	11.5	734440
	CSCF1824N6B*	G*E80704B**	19,000	13,500	14.0	12.2	1296703
	CSCF1824N6B*	G*V80704B**	19,000	13,500	14.0	12.2	1296704
	CSCF1824N6B*	G*V90704C**	19,000	13,500	14.0	12.2	1296705
	CSCF1824N6B*	G*V950453B**	19,000	13,500	14.0	12.2	1296706
	CSCF1824N6B*+EEP		19,000	13,500	13.0	11.5	1296707
	H36F	G*V80704B**	19,000	13,500	14.0	12.2	734430
	H36F	G*V90704C**	19,000	13,500	14.0	12.2	734448
	H36F	G*V950453B**	19,000	13,500	14.0	12.2	734424
	H36F+EEP		19,000	13,500	13.0	11.5	734422
GSC13 0241A*	AC30-XX		23,000	16,800	13.0	11.5	1117933
	ACNF24XX1A*		23,000	16,800	13.0	11.5	1117934
	ADPF018241A*		23,000	16,800	13.0	11.5	1117935
	ADPF182416A*		23,000	16,800	13.0	11.5	1117930
	ADPF18241B*		23,000	16,800	13.0	11.5	1117926
	AEPF183016A*		23,800	17,500	14.0	12.2	1117931
	AEPF183016B*		23,800	17,500	14.0	12.2	1277806
	AEPF18301A*		23,800	17,500	14.0	11.5	1117936
	AEPT030-00*-1*		23,800	17,500	14.0	12.2	1128834
	ARPF036-00B-1*		23,000	16,800	13.0	11.5	1117937
	ARPF18241A*		23,000	16,800	13.0	11.5	1117938
	ARPF18241B*		23,000	16,800	13.0	11.5	1117928
	ARPT032-00*-1*		23,000	16,800	13.0	11.5	1128838
	ARUF032-00*-1*		23,000	16,800	13.0	11.5	1117939
	ARUF182416A*		23,000	16,800	13.0	11.5	1117932
	ARUF18241A*		23,000	16,800	13.0	11.5	1117940
	ARUF18241B*		23,000	16,800	13.0	11.5	1117929
	ASPF183016A*		23,800	16,800	14.0	12.2	1291667
	AWB24-XX		23,000	16,800	13.0	11.5	1117941

**PRODUCT SPECIFICATIONS**

**PERFORMANCE RATINGS (CONT.)**

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0241A* (cont.)	AWUF24XX1A*		23,000	16,800	13.0	11.5	1117942
	AWUF24XX1B*		23,000	16,800	13.0	11.5	1279575
	AWUF30XX1A*		23,200	16,800	13.0	11.5	1332690
	CA*F030*2*	G*V80704B**	23,000	16,800	14.0	12.2	1117944
	CA*F030*2*	G*V90704C**	23,000	16,800	14.0	12.2	1117945
	CA*F030*2*	G*V950453B**	23,000	16,800	14.0	12.2	1117946
	CA*F030*2*	G*V950704C**	23,000	16,800	14.0	12.2	1117947
	CA*F030*2*	MBE1200**-1	23,000	16,800	14.0	12.2	1117948
	CA*F030*2*+EEP		23,000	16,800	13.0	11.5	1117943
	CA*F1824*6A*	G*E80704B**	23,000	16,800	14.0	12.2	1259442
	CA*F1824*6A*	G*V80704B**	23,000	16,800	14.0	12.2	1117949
	CA*F1824*6A*	G*V90704C**	23,000	16,800	14.0	12.2	1117950
	CA*F1824*6A*	G*V950453B**	23,000	16,800	14.0	12.2	1117951
	CA*F1824*6A*	G*V950704C**	23,000	16,800	14.0	12.2	1117952
	CA*F1824*6A*	G*V950905D**	23,000	16,800	14.0	12.2	1175505
	CA*F1824*6A*	MBE1200**-1	23,000	16,800	14.0	12.2	1118061
	CA*F1824*6A*+EEP		23,000	16,800	13.0	11.5	1286836
	CA*F1824*6B*	G*V80704B**	23,000	16,800	14.0	12.2	1347010
	CA*F1824*6B*	G*V90704C**	23,000	16,800	14.0	12.2	1347011
	CA*F1824*6B*	G*V950453B**	23,000	16,800	14.0	12.2	1347012
	CA*F1824*6B*	G*V950704C**	23,000	16,800	14.0	12.2	1347013
	CA*F1824*6B*	G*V950905D**	23,000	16,800	14.0	12.2	1347014
	CA*F1824*6B*	G*V950905D**	23,000	16,800	14.0	12.2	1347009
	CA*F1824*6B*+EEP		23,000	16,800	13.0	11.5	1347015
	CA*F1824*6B*	MBE1200**-1	23,000	16,800	14.0	12.2	1346546
	CHPF042B2*	G*V80704B**	23,800	17,500	14.0	12.2	1117953
	CHPF042B2*	G*V90704C**	23,800	17,500	14.0	12.2	1117954
	CHPF042B2*	G*V950453B**	23,800	17,500	14.0	12.2	1117955
	CHPF1824A6A*+EEP		23,000	16,800	13.0	11.5	1348047
	CHPF1824A6B*+EEP		23,000	16,800	13.0	11.5	1348048
	CHPF2430B6A*	G*V80704B**	23,800	17,500	14.0	12.2	1117956
	CHPF2430B6A*	G*V90704C**	23,800	17,500	14.0	12.2	1117957
	CHPF2430B6A*	G*V950453B**	23,800	17,500	14.0	12.2	1117958
	CHPF2430B6A*+EEP		23,000	16,800	13.0	11.5	1348049
	CHPF2430B6A*	MBE1200**-1	24,000	17,500	14.0	12.2	1277138
	CHPF2430B6B*	G*V80704B**	23,800	17,500	14.0	12.2	1330458
	CHPF2430B6B*	G*V90704C**	23,800	17,500	14.0	12.2	1330459
	CHPF2430B6B*	G*V950453B**	23,800	17,500	14.0	12.2	1330460
	CHPF2430B6B*+EEP		23,000	16,800	13.0	11.5	1348050
	CHPF2430B6B	MBE1200**-1A*	24,000	17,500	14.0	12.2	1347578
	CSCF1824N6A*	G*E80704B**	23,000	16,800	14.0	12.2	1259444
	CSCF1824N6A*	G*V80704B**	23,000	16,800	14.0	12.2	1117959
	CSCF1824N6A*	G*V90704C**	23,000	16,800	14.0	12.2	1117960
	CSCF1824N6A*	G*V950453B**	23,000	16,800	14.0	12.2	1117961
	CSCF1824N6B*	G*E80704B**	23,000	16,800	14.0	12.2	1296708
	CSCF1824N6B*	G*V80704B**	23,000	16,800	14.0	12.2	1296709
	CSCF1824N6B*	G*V90704C**	23,000	16,800	14.0	12.2	1296710
	CSCF1824N6B*	G*V950453B**	23,000	16,800	14.0	12.2	1296711
	H36F	G*V80704B**	23,000	16,800	14.0	12.2	1117963
	H36F	G*V90704C**	23,000	16,800	14.0	12.2	1117964
H36F	G*V950453B**	23,000	16,800	14.0	12.2	1117965	
H36F+EEP		23,000	16,800	13.0	11.5	1117962	

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0301A*	AC36-XX		28,000	20,500	13.0	11.5	734698
	ACNF30XX1A*		28,000	20,500	13.0	11.5	734815
	ADPF304216A*		29,000	21,500	13.0	11.5	1038108
	ADPF30421A*		29,000	21,500	13.0	11.5	734826
	ADPF30421B*		29,000	21,500	13.0	11.5	1062390
	AEPF183016A*		29,000	21,500	14.0	12.2	1038109
	AEPF183016B*		29,000	21,500	14.0	12.2	1277808
	AEPF18301A*		29,000	21,500	14.0	12.2	734732
	AEPT030-00*-1*		29,000	21,500	14.0	12.2	734714
	AR*F182416A*		27,600	20,400	13.0	11.5	1347357
	AR*F363616A*		29,000	21,500	13.5	11.8	1273401
	ARPF048-00B-1*		29,000	21,500	13.0	11.5	734798
	ARPF303016A*		29,000	21,500	13.0	11.5	1038110
	ARPF30301A*		29,000	21,500	13.0	11.5	734886
	ARPF30301B*		29,000	21,500	13.0	11.5	1062392
	ARPT042-00*-1*		29,000	21,500	13.0	11.5	734879
	ARUF042-00*-1*		29,000	21,500	13.0	11.5	734889
	ARUF182416A*		27,600	20,400	13.0	11.5	1038144
	ARUF18241A*		27,600	20,400	13.0	11.5	1038143
	ARUF18241B*		27,600	20,400	13.0	11.5	1062393
	ARUF303016A*		29,000	21,500	13.0	11.5	1038111
	ARUF30301A*		29,000	21,500	13.0	11.5	734784
	ARUF30301B*		29,000	21,500	13.0	11.5	1062394
	ASPF183016A*		29,000	21,500	14.0	12.2	1291668
	AWB36-XX		28,000	20,500	13.0	11.5	734873
	AWUF30XX1A*		28,000	20,500	13.0	11.5	1330608
	AWUF36XX1A*		28,000	20,500	13.0	11.5	734875
	CA*F037*2*	G*V80704B**	29,000	21,500	14.0	12.2	734672
	CA*F037*2*	G*V90704C**	29,000	21,500	14.0	12.2	734651
	CA*F037*2*	G*V950453B**	29,000	21,500	14.0	12.2	734774
	CA*F037*2*	G*V950704C**	29,000	21,500	14.0	12.2	734902
	CA*F037*2*+EEP		29,000	21,500	13.0	11.5	734718
	CA*F037*2*	MBE1200**-1	29,000	21,500	14.0	12.2	734687
	CA*F042*2*+EEP		29,000	21,500	13.0	11.5	879290
	CA*F049*2*+EEP		29,400	21,800	13.0	11.5	1328361
	CA*F3030*6A*	G*V80704B**	29,000	21,500	14.0	12.2	734807
	CA*F3030*6A*	G*V90704C**	29,000	21,500	14.0	12.2	736252
	CA*F3030*6A*	G*V950453B**	29,000	21,500	14.0	12.2	734781
	CA*F3030*6A*	G*V950704C**	29,000	21,500	14.0	12.2	734724
	CA*F3030*6A*	G*V950704C**	29,000	21,500	14.0	12.2	1348557
	CA*F3030*6A*	G*V950905D**	29,000	21,500	14.0	12.2	1175506
	CA*F3030*6A*+EEP		29,000	21,500	13.0	11.5	734671
CA*F3030*6A*	MBE1200	29,000	21,500	14.0	12.2	734816	
CA*F3030*6B*	G*V80704B**	29,000	21,500	14.0	12.2	1348558	
CA*F3030*6B*	G*V90704C**	29,000	21,500	14.0	12.2	1347022	
CA*F3030*6B*	G*V950453B**	29,000	21,500	14.0	12.2	1347023	
CA*F3030*6B*	G*V950704C**	29,000	21,500	14.0	12.2	1347024	
CA*F3030*6B*	G*V950905D**	29,000	21,500	14.0	12.2	1347021	
CA*F3030*6B*	G*V950905D**	29,000	21,500	14.0	12.2	1347025	
CA*F3030*6B*+EEP		29,000	21,500	13.0	11.5	1347026	

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F See Notes on Page 6.

**PRODUCT SPECIFICATIONS**

**PERFORMANCE RATINGS (CONT.)**

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0301A* (cont.)	CA*F3030*6B*	MBE1200**-1	29,000	21,500	14.0	12.2	1347027
	CA*F3131*6A*	G*V80905C**	29,000	21,500	14.0	12.0	1277145
	CA*F3131*6A*+EEP		29,000	21,500	13.0	11.5	879204
	CA*F3131*6B*	G*V80905C**	29,000	21,500	14.0	12.0	1347028
	CA*F3131*6B*+EEP		29,000	21,500	13.0	11.5	1347029
	CHPF042B2*	G*V80704B**	29,400	21,800	14.0	12.2	734801
	CHPF042B2*	G*V90704C**	29,400	21,800	14.0	12.2	734748
	CHPF042B2*	G*V950453B**	29,400	21,800	14.0	12.2	734726
	CHPF042B2*+EEP		29,000	21,500	13.0	11.5	734727
	CHPF2430B6A*	G*E80704B**	29,400	21,800	14.0	12.2	1259446
	CHPF2430B6A*	G*V80704B**	29,400	21,800	14.0	12.2	734888
	CHPF2430B6A*	G*V90704C**	29,400	21,800	14.0	12.2	734865
	CHPF2430B6A*	G*V950453B**	29,400	21,800	14.0	12.2	734666
	CHPF2430B6A*+EEP		29,000	21,500	13.0	11.5	734900
	CHPF2430B6A*	MBE1200**-1	29,000	21,500	14.0	12.2	1088816
	CHPF2430B6B*	G*E80704B**	29,400	21,800	14.0	12.2	1347545
	CHPF2430B6B*	G*V80704B**	29,400	21,800	14.0	12.2	1348559
	CHPF2430B6B*	G*V90704C**	29,400	21,800	14.0	12.2	1330549
	CHPF2430B6B*	G*V950453B**	29,400	21,800	14.0	12.2	1330548
	CHPF2430B6B*	G*V950453B**	29,400	21,800	14.0	12.2	1330550
	CHPF2430B6B*+EEP		29,000	21,500	13.0	11.5	1330551
	CHPF2430B6B*	MBE1200**-1A*	29,000	21,500	14.0	12.2	1330464
	CHPF3636B6A*+EEP		29,000	21,700	13.0	11.5	1046066
	CHPF3636B6B*+EEP		29,000	21,700	13.0	11.5	1330665
	CHPX042B2*+EEP		29,000	21,500	13.0	11.5	1126484
	CSCF3036N6A*	G*E80704B**	29,000	21,500	14.0	12.2	1259448
	CSCF3036N6A*	G*V80704B**	29,000	21,500	14.0	12.2	734809
	CSCF3036N6A*	G*V90704C**	29,000	21,500	14.0	12.2	734728
	CSCF3036N6A*	G*V950453B**	29,000	21,500	14.0	12.2	734794
	CSCF3036N6A*	G*V950453B**	29,000	21,500	14.0	12.2	1348560
	CSCF3036N6A*+EEP		29,000	21,500	13.0	11.5	734814
	CSCF3036N6B*	G*E80704B**	29,000	21,500	14.0	12.2	1296715
	CSCF3036N6B*	G*E80704B**	29,000	21,500	14.0	12.2	1348561
	CSCF3036N6B*	G*V80704B**	29,000	21,500	14.0	12.2	1296716
	CSCF3036N6B*	G*V90704C**	29,000	21,500	14.0	12.2	1296717
	CSCF3036N6B*	G*V950453B**	29,000	21,500	14.0	12.2	1296718
	CSCF3036N6B*+EEP		29,000	21,500	13.0	11.5	1296719
	H49F	G*V80704B**	29,000	21,500	14.0	12.2	734746
	H49F	G*V90704C**	29,000	21,500	14.0	12.2	734837
	H49F	G*V950453B**	29,000	21,500	14.0	12.2	734761
H49F+EEP		29,000	21,500	13.0	11.5	734795	
GSC13 0361D*	ADPF304216A*		35,000	25,400	13.0	11.5	1118147
	ADPF30421A*		35,000	25,400	13.0	11.5	1118201
	ADPF30421B*		35,000	25,400	13.0	11.5	1118151
	AEPF303616A*		35,000	25,400	14.0	12.2	1118148
	AEPF303616B*		35,000	25,400	14.0	12.2	1277813
	AEPF30361A*		35,000	25,400	14.0	12.2	1118202
	AEPT036-00*-1*		35,000	25,400	14.0	12.2	1128836
	AR*F363616A*		35,000	25,400	13.0	11.5	1276392
	ARPF048-00B-1*		35,000	25,400	13.0	11.5	1118200
	ARPF364216A*		35,000	25,400	13.0	11.5	1118149

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0361D* (cont.)	ARPF36421A*		35,000	25,400	13.0	11.5	1118198
	ARPF36421B*		35,000	25,400	13.0	11.5	1118153
	ARPT049-00*-1*		35,000	25,400	13.0	11.5	1128841
	ARUF049-00*-1*		35,000	25,400	13.0	11.5	1118199
	ARUF364216A*		35,000	25,400	13.0	11.5	1118150
	ARUF36421A*		35,000	25,400	13.0	11.5	1118197
	ARUF36421B*		35,000	25,400	13.0	11.5	1118154
	ASPF303616A*		35,000	25,400	14.0	12.2	1291670
	AWB36-XX		33,600	24,500	13.0	11.5	1118196
	AWUF36XX1A*		33,600	24,500	13.0	11.5	1118195
	CA*F048*2*	G*V80704B**	35,000	25,400	14.0	12.2	1118189
	CA*F048*2*	G*V80905C**	35,000	25,400	14.0	12.2	1118190
	CA*F048*2*	G*V90905D**	35,000	25,400	14.0	12.2	1118191
	CA*F048*2*	G*V950905D**	35,000	25,400	14.0	12.2	1118192
	CA*F048*2*	G*V951155D**	35,000	25,400	14.0	12.2	1118193
	CA*F048*2*+EEP		35,000	25,400	13.0	11.5	1118194
	CA*F048*2*	MBE1600**-1	35,000	25,400	14.0	12.2	1118188
	CA*F3636*6A*	G*V80704B**	35,000	25,400	14.0	12.2	1118185
	CA*F3636*6A*	G*V80905C**	35,000	25,400	14.0	12.2	1118186
	CA*F3636*6A*	G*V90905D**	35,000	25,400	14.0	12.2	1118187
	CA*F3636*6A*	G*V950704C**	35,000	25,400	14.0	12.2	1126465
	CA*F3636*6A*	G*V950905D**	35,000	25,400	14.0	12.2	1118182
	CA*F3636*6A*	G*V951155D**	35,000	25,400	14.0	12.2	1118183
	CA*F3636*6A*+EEP		35,000	25,400	13.0	11.5	1118184
	CA*F3636*6A*	MBE1600**-1	35,000	25,400	14.0	12.2	1118179
	CA*F3636*6B*	G*V80704B**	35,000	25,400	14.0	12.2	1348583
	CA*F3636*6B*	G*V80905C**	35,000	25,400	14.0	12.2	1347056
	CA*F3636*6B*	G*V90905D**	35,000	25,400	14.0	12.2	1347057
	CA*F3636*6B*	G*V950704C**	35,000	25,400	14.0	12.2	1347058
	CA*F3636*6B*	G*V950905D**	35,000	25,400	14.0	12.2	1347059
	CA*F3636*6B*	G*V951155D**	35,000	25,400	14.0	12.2	1347060
	CA*F3636*6B*	G*V951155D**	35,000	25,400	14.0	12.2	1347055
	CA*F3636*6B*+EEP		35,000	25,400	13.0	11.5	1347061
	CA*F3636*6B*	MBE1600**-1	35,000	25,400	14.0	12.2	1346550
	CA*F3642*6A*+TXV	G*E80905C**	35,000	25,400	14.0	12.2	1260286
	CA*F3642*6B*+TXV	G*E80905C**	35,000	25,400	14.0	12.2	1346551
	CA*F4860*6A*	G*E80704B**	35,000	25,400	14.0	12.2	1259599
	CA*F4860*6B*	G*E80704B**	35,000	25,400	14.0	12.2	1346552
	CHPF048D2*	G*V80704B**	35,000	25,400	14.0	12.2	1118180
	CHPF048D2*	G*V80905C**	35,000	25,400	14.0	12.2	1118181
	CHPF048D2*	G*V90905D**	35,000	25,400	14.0	12.2	1118178
	CHPF048D2*	G*V950905D**	35,000	25,400	14.0	12.2	1118177
	CHPF048D2*	G*V951155D**	35,000	25,400	14.0	12.2	1118176
	CHPF048D2*+EEP		35,000	25,400	13.0	11.5	1145062
	CHPF3636B6A*+EEP		35,000	25,400	13.0	11.5	1118175
	CHPF3636B6B*+EEP		35,000	25,400	13.0	11.5	1330469
	CHPF3642C6A*	G*E80905C**	35,000	25,400	14.0	12.2	1260289
	CHPF3642C6A*+EEP		35,000	25,400	13.0	11.5	1118174
	CHPF3642C6B*	G*E80905C**	35,000	25,400	14.0	12.2	1347551
	CHPF3642C6B*	G*V80704B**	35,000	25,400	14.0	12.2	1348584

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

See Notes on Page 13.

**PRODUCT SPECIFICATIONS**

**PERFORMANCE RATINGS (CONT.)**

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0361D* (cont.)	CHPF3642C6B*	G*V80905C**	35,000	25,400	14.0	12.2	1330472
	CHPF3642C6B*	G*V80905C**	35,000	25,400	14.0	12.2	1330471
	CHPF3642C6B*+EEP		35,000	25,400	13.0	11.5	1330470
	CHPF3642D6A*	G*V80704B**	35,000	25,400	14.0	12.2	1118172
	CHPF3642D6A*	G*V80905C**	35,000	25,400	14.0	12.2	1118170
	CHPF3642D6A*	G*V90905D**	35,000	25,400	14.0	12.2	1118171
	CHPF3642D6A*	G*V950905D**	35,000	25,400	14.0	12.2	1118169
	CHPF3642D6A*	G*V951155D**	35,000	25,400	14.0	12.2	1118168
	CHPF3642D6A*+EEP		35,000	25,400	13.0	11.5	1118173
	CHPF3642D6B*	G*V90905D**	35,000	25,400	14.0	12.2	1348585
	CHPF3642D6B*	G*V950905D**	35,000	25,400	14.0	12.2	1330474
	CHPF3642D6B*	G*V951155D**	35,000	25,400	14.0	12.2	1330473
	CHPF3642D6B*	G*V951155D**	35,000	25,400	14.0	12.2	1330475
	CHPF3642D6B*+EEP		35,000	25,400	13.0	11.5	1330476
	CHPF4860*6A*	G*E80704B**	35,000	25,600	14.0	12.2	1259600
	CHPF4860D6C*	G*E80704B**	35,000	25,600	14.0	12.2	1347554
	CSCF3036N6A*	G*V80704B**	35,000	25,400	14.0	12.2	1118165
	CSCF3036N6A*	G*V80905C**	35,000	25,400	14.0	12.2	1118166
	CSCF3036N6A*	G*V90905D**	35,000	25,400	14.0	12.2	1118164
	CSCF3036N6A*	G*V950905D**	35,000	25,400	14.0	12.2	1118163
	CSCF3036N6A*	G*V951155D**	35,000	25,400	14.0	12.2	1118162
	CSCF3036N6A*+EEP		35,000	25,400	13.0	11.5	1118167
	CSCF3036N6A*+TXV	G*E80704B**	35,000	25,400	14.0	12.2	1259601
	CSCF3036N6B*	G*V80704B**	35,000	25,400	14.0	12.2	1296743
	CSCF3036N6B*	G*V80905C**	35,000	25,400	14.0	12.2	1296744
	CSCF3036N6B*	G*V90905D**	35,000	25,400	14.0	12.2	1296745
	CSCF3036N6B*	G*V950905D**	35,000	25,400	14.0	12.2	1296746
	CSCF3036N6B*	G*V951155D**	35,000	25,400	14.0	12.2	1296747
	CSCF3036N6B*+EEP		35,000	25,400	13.0	11.5	1296748
	CSCF3036N6B*+TXV	G*E80704B**	35,000	25,400	14.0	12.2	1296749
	CSCF3642N6A*	G*E80905C**	35,000	25,400	14.0	12.2	1260409
	CSCF3642N6C*	G*E80905C**	35,000	25,400	14.0	12.2	1296678
	H49F	G*V80704B**	35,000	25,400	14.0	12.2	1118160
	H49F	G*V80905C**	35,000	25,400	14.0	12.2	1118158
	H49F	G*V90905D**	35,000	25,400	14.0	12.2	1118159
	H49F	G*V950905D**	35,000	25,400	14.0	12.2	1118157
	H49F	G*V951155D**	35,000	25,400	14.0	12.2	1118156
	H49F+EEP		35,000	25,400	13.0	11.5	1118161
	H60F+EEP		35,000	25,600	13.0	11.5	1118155
	GSC13 0363A*	ADPF304216A*		35,000	25,600	13.0	11.5
ADPF30421A*			35,000	25,600	13.0	11.5	735061
ADPF30421B*			35,000	25,600	13.0	11.5	1062407
AEPF303616A*			35,000	25,600	14.0	12.2	1038170
AEPF303616B*			35,000	25,600	14.0	12.2	1277815
AEPF30361A*			35,000	25,600	14.0	12.2	735042
AEPT036-00*-1*			35,000	25,600	14.0	12.2	735118
ARPF048-00B-1*			35,000	25,600	13.0	11.5	735048
ARPF364216A*			35,000	25,600	13.0	11.5	1038169
ARPF36421A*			35,000	25,600	13.0	11.5	735038
ARPF36421B*			35,000	25,600	13.0	11.5	1062409
ARPT049-00*-1*			35,000	25,600	13.0	11.5	735181

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0363A* (cont.)	ASPF303616A*		35,000	25,600	14.0	12.2	1293239
	CA*F048*2*+EEP		35,000	25,600	13.0	11.5	735113
	CA*F3636*6A*+EEP		35,000	25,600	13.0	11.5	735184
	CA*F3636*6B*+EEP		35,000	25,600	13.0	11.5	1347173
	CHPF048D2*+EEP		35,000	25,600	13.0	11.5	735064
	CHPF3636B6A*+EEP		35,000	25,600	13.0	11.5	735246
	CHPF3636B6B*+EEP		35,000	25,600	13.0	11.5	1330568
	CHPF3642C6A*+EEP		35,000	25,600	13.0	11.5	735126
	CHPF3642C6B*+EEP		35,000	25,600	13.0	11.5	1330569
	CHPF3642D6A*+EEP		35,000	25,600	13.0	11.5	735966
	CHPF3642D6B*+EEP		35,000	25,600	13.0	11.5	1330570
	CSCF3036N6A*+EEP		35,000	25,600	13.0	11.5	735236
	CSCF3036N6B*+EEP		35,000	25,600	13.0	11.5	1296756
	H49F+EEP		35,000	25,600	13.0	11.5	735111
GSC13 0421A*	ADPF304216A*		40,500	30,400	13.0	11.5	1038124
	ADPF30421A*		40,500	30,400	13.0	11.5	734788
	ADPF30421B*		40,500	30,400	13.0	11.5	1062410
	AEPF426016A*		41,000	31,000	14.0	12.2	1038125
	AEPF426016B*		41,000	31,000	14.0	12.2	1277816
	AEPF42601A*		41,000	31,000	14.0	12.2	734878
	AEPT060-00*-1*		41,000	31,000	14.0	12.2	734783
	ARPF048-00B-1*		40,500	30,400	13.0	11.5	734861
	ARPF364216A*		40,500	30,400	13.0	11.5	1038126
	ARPF36421A*		40,500	30,400	13.0	11.5	734843
	ARPF36421B*		40,500	30,400	13.0	11.5	1062412
	ARPT049-00*-1*		40,500	30,400	13.0	11.5	734833
	ARUF049-00*-1*		40,500	30,400	13.0	11.5	734650
	ARUF364216A*		40,500	30,400	13.0	11.5	1038127
	ARUF36421A*		40,500	30,400	13.0	11.5	734857
	ARUF36421B*		40,500	30,400	13.0	11.5	1062413
	ARUF486016A*		41,500	31,000	13.0	11.5	1038142
	ARUF48601A*		41,500	31,000	13.0	11.5	1038141
	ARUF48601B*		41,500	31,000	13.0	11.5	1062414
	ASPF426016A*		41,000	30,800	14.0	12.2	1291672
	CA*F060*2*+EEP		40,500	30,400	13.0	11.5	734676
	CA*F060*2*	MBE1600	40,500	30,400	14.0	12.2	734897
	CA*F061*2*	G*V80905C**	41,500	31,000	14.0	12.2	734670
	CA*F061*2*	G*V81155C**	41,500	31,000	14.0	12.2	734681
	CA*F061*2*	G*V90905D**	41,500	31,000	13.5	11.8	734679
	CA*F061*2*	G*V950905D**	41,500	31,000	13.5	11.8	734753
	CA*F061*2*	G*V951155D**	41,500	31,000	13.5	11.8	734776
	CA*F3642*6A*+EEP		40,500	30,400	13.0	11.5	734694
	CA*F3642*6A*	MBE1600	40,500	30,400	14.0	12.2	734702
	CA*F3642*6B*+EEP		40,500	30,400	13.0	11.5	1347069
	CA*F3642*6B*	MBE1600**-1	40,500	30,400	14.0	12.2	1346554

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

**Notes:**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP: Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

**PRODUCT SPECIFICATIONS**

**PERFORMANCE RATINGS (CONT.)**

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0421A* (cont.)	CA*F4860*6A*	G*E80905C**	41,500	31,000	14.0	12.2	1260512
	CA*F4860*6A*	G*E81155C**	41,500	31,000	14.0	12.2	1260033
	CA*F4860*6A*	G*V80905C**	41,500	31,000	14.0	12.2	734896
	CA*F4860*6A*	G*V81155C**	41,500	31,000	14.0	12.2	734789
	CA*F4860*6A*	G*V90905D**	41,500	31,000	13.5	11.8	734665
	CA*F4860*6A*	G*V950704C**	41,000	30,800	13.5	11.8	1328362
	CA*F4860*6A*	G*V950905D**	41,500	31,000	13.5	11.8	734811
	CA*F4860*6A*	G*V951155D**	41,500	31,000	13.5	11.8	734864
	CA*F4860*6B*	G*E81155C**	41,500	31,000	14.0	12.2	1346556
	CA*F4860*6B*	G*V80905C**	41,500	31,000	14.0	12.2	1346557
	CA*F4860*6B*	G*V81155C**	41,500	31,000	14.0	12.2	1346558
	CA*F4860*6B*	G*V90905D**	41,500	31,000	13.5	11.8	1346559
	CA*F4860*6B*	G*V950704C**	41,000	30,800	13.5	11.8	1346560
	CA*F4860*6B*	G*V950905D**	41,500	31,000	13.5	11.8	1346561
	CA*F4860*6B*	G*V951155D**	41,500	31,000	13.5	11.8	1346562
	CA*F4860*6B*	G*V951155D**	41,500	31,000	13.5	11.8	1346555
	CA*F4860*6B*+EEP		41,000	30,800	13.0	11.5	1347168
	CAPF061*2*+EEP		41,000	30,800	13.0	11.5	1002303
	CAPF4860*6A*+EEP		41,000	30,800	13.0	11.5	1002304
	CHPF048D2*+EEP		40,500	30,400	13.0	11.5	734740
	CHPF060D2*	G*V81155C**	41,500	31,000	14.0	12.2	734868
	CHPF060D2*	G*V90905D**	41,500	31,000	13.5	11.8	734862
	CHPF060D2*	G*V951155D**	41,500	31,000	13.5	11.8	734677
	CHPF060D2*+EEP		41,000	30,800	13.0	11.5	1002301
	CHPF3642C6A*+EEP		40,500	30,400	13.0	11.5	734725
	CHPF3642C6A*	MBE1600**-1	39,000	29,000	14.0	12.2	1088818
	CHPF3642C6B*+EEP		40,500	30,400	13.0	11.5	1330571
	CHPF3642C6B*	MBE1600**-1A*	39,000	29,000	14.0	12.2	1330485
	CHPF3642D6A*+EEP		40,500	30,400	13.0	11.5	734682
	CHPF3642D6B*+EEP		40,500	30,400	13.0	11.5	1330572
	CHPF4860D6A*	G*E81155C**	41,500	31,000	14.0	12.2	1260034
	CHPF4860D6A*	G*V81155C**	41,500	31,000	14.0	12.2	734652
	CHPF4860D6A*	G*V90905D**	41,500	31,000	13.5	11.8	734838
	CHPF4860D6A*	G*V951155D**	41,500	31,000	13.5	11.8	734759
	CHPF4860D6A*+EEP		41,000	30,800	13.0	11.5	1002302
	CHPF4860D6C*	G*E81155C**	41,500	31,000	14.0	12.2	1347558
	CHPF4860D6C*	G*V90905D**	41,500	31,000	13.5	11.8	1330574
	CHPF4860D6C*	G*V951155D**	41,500	31,000	13.5	11.8	1330575
	CHPF4860D6C*	G*V951155D**	41,500	31,000	13.5	11.8	1330573
	CHPF4860D6C*+EEP		41,000	30,800	13.0	11.5	1330487
	CSCF3642N6A*+EEP		40,500	30,400	13.0	11.5	734769
	CSCF3642N6C*+EEP		40,500	30,400	13.0	11.5	1296679
	CSCF4860N6A*	G*E81155C**	41,500	31,000	14.0	12.2	1260035
	CSCF4860N6A*	G*V81155C**	41,500	31,000	14.0	12.2	734800
	CSCF4860N6A*	G*V90905D**	41,500	31,000	13.5	11.8	734763
	CSCF4860N6A*	G*V951155D**	41,500	31,000	13.5	11.8	734749
	CSCF4860N6C*	G*E81155C**	41,500	31,000	14.0	12.2	1296757
	CSCF4860N6C*	G*V81155C**	41,500	31,000	14.0	12.2	1296758
	CSCF4860N6C*	G*V90905D**	41,500	31,000	13.5	11.8	1296759
	CSCF4860N6C*	G*V951155D**	41,500	31,000	13.5	11.8	1296760
H60F+EEP		40,500	30,400	13.0	11.5	734872	
H61F	G*V81155C**	41,500	31,000	14.0	12.2	734684	
H61F	G*V90905D**	41,500	31,000	13.5	11.8	734771	
H61F	G*V951155D**	41,500	31,000	13.5	11.8	734683	
H61F+EEP		42,000	31,500	13.0	11.5	1038150	

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0481A*	ADPF486016A*		46,000	34,000	13.0	11.5	1038128
	ADPF48601A*		45,500	33,800	13.0	11.5	734791
	ADPF48601B*		46,000	34,000	13.0	11.5	1062415
	AEPF426016A*		46,000	34,000	14.0	12.2	1038129
	AEPF426016B*		46,000	34,000	14.0	12.2	1277817
	AEPF42601A*		45,500	33,800	14.0	12.2	734696
	AEPT060-00*-1*		45,500	33,800	14.0	12.2	734757
	ARPF060-00B-1*		45,500	33,800	13.0	11.5	734756
	ARPF486016A*		46,000	34,000	13.0	11.5	1038130
	ARPF48601A*		45,500	33,800	13.0	11.5	734813
	ARPF48601B*		46,000	34,000	13.0	11.5	1062417
	ARPT061-00*-1*		45,500	33,800	13.0	11.5	734853
	ARUF061-00*-1*		45,500	33,800	13.0	11.5	734703
	ARUF486016A*		46,000	34,000	13.0	11.5	1038131
	ARUF48601A*		45,500	33,800	13.0	11.5	734772
	ARUF48601B*		46,000	34,000	13.0	11.5	1062418
	ASPF426016A*		46,000	34,000	14.0	12.2	1291673
	CA*F061*2*	G*V80905C**	45,500	33,800	13.5	11.8	734854
	CA*F061*2*	G*V81155C**	45,500	33,800	13.5	11.8	734881
	CA*F061*2*	G*V90905D**	45,500	33,800	13.5	11.8	734719
	CA*F061*2*	G*V950905D**	45,500	33,800	13.5	11.8	734734
	CA*F061*2*	G*V951155D**	45,500	33,800	13.5	11.8	734720
	CA*F061*2*+EEP		45,500	33,800	13.0	11.5	734699
	CA*F061*2*	MBE2000	45,500	33,800	14.0	12.2	734712
	CA*F4860*6A*	G*V80905C**	45,500	33,800	13.5	11.8	734663
	CA*F4860*6A*	G*V81155C**	45,500	33,800	13.5	11.8	734750
	CA*F4860*6A*	G*V90905D**	45,500	33,800	13.5	11.8	734733
	CA*F4860*6A*	G*V950905D**	45,500	33,800	13.5	11.8	734822
	CA*F4860*6A*	G*V951155D**	45,500	33,800	13.5	11.8	734796
	CA*F4860*6A*+EEP		45,500	33,800	13.0	11.5	734828
	CA*F4860*6A*	MBE2000	45,500	33,800	14.0	12.2	734729
	CA*F4860*6A*+TXV	G*E80905C**	45,500	33,800	13.5	11.8	1260513
	CA*F4860*6A*+TXV	G*E81155C**	45,500	33,800	13.5	11.8	1260037
	CA*F4860*6B*	G*V81155C**	45,500	33,800	13.5	11.8	1346564
	CA*F4860*6B*	G*V90905D**	45,500	33,800	13.5	11.8	1346565
	CA*F4860*6B*	G*V950905D**	45,500	33,800	13.5	11.8	1346566
	CA*F4860*6B*	G*V951155D**	45,500	33,800	13.5	11.8	1346567
	CA*F4860*6B*	G*V951155D**	45,500	33,800	13.5	11.8	1346563
	CA*F4860*6B*+EEP		45,500	33,800	13.0	11.5	1347070
	CA*F4860*6B*	MBE2000**-1	45,500	33,800	14.0	12.2	1346568
	CA*F4860*6B*+TXV	G*E81155C**	45,500	33,800	13.5	11.8	1347072
	CA*F4860*6B*+TXV	G*E81155C**	45,500	33,800	13.5	11.8	1347071
	CHPF060D2*	G*V80905C**	45,500	33,800	13.5	11.8	734669
	CHPF060D2*	G*V81155C**	45,500	33,800	13.5	11.8	734808
	CHPF060D2*	G*V90905D**	45,500	33,800	13.5	11.8	734899
	CHPF060D2*	G*V950905D**	45,500	33,800	13.5	11.8	734839
	CHPF060D2*	G*V951155D**	45,500	33,800	13.5	11.8	736537
	CHPF060D2*+EEP		45,500	33,800	13.0	11.5	734825
CHPF4860D6A*	G*V80905C**	45,500	33,800	13.5	11.8	734688	
CHPF4860D6A*	G*V81155C**	45,500	33,800	13.5	11.8	734869	

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

See Notes on Page 13.

**PRODUCT SPECIFICATIONS**

**PERFORMANCE RATINGS (CONT.)**

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0481A* (cont.)	CHPF4860D6A*	G*V90905D**	45,500	33,800	13.5	11.8	734708
	CHPF4860D6A*	G*V950905D**	45,500	33,800	13.5	11.8	734713
	CHPF4860D6A*	G*V951155D**	45,500	33,800	13.5	11.8	736533
	CHPF4860D6A*+EEP		45,500	33,800	13.0	11.5	734877
	CHPF4860D6A*	MBE2000**-1	45,000	33,600	14.0	12.2	1088819
	CHPF4860D6A*+TXV	G*E80905C**	45,500	33,800	13.5	11.8	1260514
	CHPF4860D6A*+TXV	G*E81155C**	45,500	33,800	13.5	11.8	1260038
	CHPF4860D6C*	G*V81155C**	45,500	33,800	13.5	11.8	1330577
	CHPF4860D6C*	G*V90905D**	45,500	33,800	13.5	11.8	1330578
	CHPF4860D6C*	G*V950905D**	45,500	33,800	13.5	11.8	1330579
	CHPF4860D6C*	G*V951155D**	45,500	33,800	13.5	11.8	1330576
	CHPF4860D6C*	G*V951155D**	45,500	33,800	13.5	11.8	1330580
	CHPF4860D6C*+EEP		45,500	33,800	13.0	11.5	1330581
	CHPF4860D6C*	MBE2000**-1	45,000	33,600	14.0	12.2	1347559
	CHPF4860D6C*+TXV	G*E80905C**	45,500	33,800	13.5	11.8	1347569
	CHPF4860D6C*+TXV	G*E81155C**	45,500	33,800	13.5	11.8	1347568
	CSCF4860N6A*	G*V80905C**	45,500	33,800	13.5	11.8	734780
	CSCF4860N6A*	G*V81155C**	45,500	33,800	13.5	11.8	734778
	CSCF4860N6A*	G*V90905D**	45,500	33,800	13.5	11.8	734716
	CSCF4860N6A*	G*V950905D**	45,500	33,800	13.5	11.8	734655
	CSCF4860N6A*	G*V951155D**	45,500	33,800	13.5	11.8	734721
	CSCF4860N6A*+EEP		45,500	33,800	13.0	11.5	734885
	CSCF4860N6A*+TXV	G*E80905C**	45,500	33,800	13.5	11.8	1260515
	CSCF4860N6A*+TXV	G*E81155C**	45,500	33,800	13.5	11.8	1260039
	CSCF4860N6C*	G*V80905C**	45,500	33,800	13.5	11.8	1296761
	CSCF4860N6C*	G*V81155C**	45,500	33,800	13.5	11.8	1296762
	CSCF4860N6C*	G*V90905D**	45,500	33,800	13.5	11.8	1296763
	CSCF4860N6C*	G*V950905D**	45,500	33,800	13.5	11.8	1296764
	CSCF4860N6C*	G*V951155D**	45,500	33,800	13.5	11.8	1296765
	CSCF4860N6C*+EEP		45,500	33,800	13.0	11.5	1296766
	CSCF4860N6C*+TXV	G*E80905C**	45,500	33,800	13.5	11.8	1296767
	CSCF4860N6C*+TXV	G*E81155C**	45,500	33,800	13.5	11.8	1296768
	H61F	G*V80905C**	45,500	33,800	13.5	11.8	734792
H61F	G*V81155C**	45,500	33,800	13.5	11.8	734715	
H61F	G*V90905D**	45,500	33,800	13.5	11.8	734797	
H61F	G*V950905D**	45,500	33,800	13.5	11.8	734834	
H61F	G*V951155D**	45,500	33,800	13.5	11.8	734777	
H61F+EEP		45,500	33,800	13.0	11.5	734735	
GSC13 0483A*	ADPF486016A*		46,000	34,000	13.0	11.5	1038168
	ADPF48601A*		45,500	33,800	13.0	11.5	872332
	ADPF48601B*		46,000	34,000	13.0	11.5	1062419
	AEPF426016A*		46,000	34,000	14.0	12.2	1038167
	AEPF426016B*		46,000	34,000	14.0	12.2	1277818
	AEPF42601A*		45,500	33,800	14.0	12.2	872366
	AEPT060-00*-1*		45,500	33,800	14.0	12.2	872400
	ARPF060-00B-1*		45,500	33,800	13.0	11.5	872345
	ARPF486016A*		46,000	34,000	13.0	11.5	1038165
	ARPF48601A*		45,500	33,800	13.0	11.5	872351
	ARPF48601B*		46,000	34,000	13.0	11.5	1062421
	ARPT061-00*-1*		45,500	33,800	13.0	11.5	872223
	ARUF061-00*-1*		45,500	33,800	13.0	11.5	872220

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0483A* (cont.)	ARUF486016A*		46,000	34,000	13.0	11.5	1038166
	ARUF48601A*		45,500	33,800	13.0	11.5	872282
	ARUF48601B*		45,500	33,800	13.0	11.5	1062422
	ASPF426016A*		46,000	34,000	14.0	12.2	1291674
	CA*F061*2*+EEP		45,500	33,800	13.0	11.5	869440
	CA*F4860*6A*+EEP		45,500	33,800	13.0	11.5	869438
	CA*F4860*6B*+EEP		45,500	33,800	13.0	11.5	1347073
	CHPF060D2*+EEP		45,500	33,800	13.0	11.5	869450
	CHPF4860D6A*+EEP		45,500	33,800	13.0	11.5	869456
	CHPF4860D6C*+EEP		45,500	33,800	13.0	11.5	1330582
	CSCF4860N6A*+EEP		45,500	33,800	13.0	11.5	869457
	CSCF4860N6C*+EEP		45,500	33,800	13.0	11.5	1296769
	H61F+EEP		45,500	33,800	13.0	11.5	869462
GSC13 0484A*	ADPF486016A*		46,000	34,000	13.0	11.5	1038164
	ADPF48601A*		45,500	33,800	13.0	11.5	872367
	ADPF48601B*		45,500	33,800	13.0	11.5	1062440
	AEPF426016A*		46,000	34,000	14.0	12.2	1038163
	AEPF426016B*		46,000	34,000	14.0	12.2	1277819
	AEPF42601A*		45,500	33,800	14.0	12.2	872388
	AEPT060-00*-1*		45,500	33,800	14.0	12.2	872398
	ARPF060-00B-1*		45,500	33,800	13.0	11.5	872371
	ARPF486016A*		46,000	34,000	13.0	11.5	1038162
	ARPF48601A*		45,500	33,800	13.0	11.5	872337
	ARPF48601B*		45,500	33,800	13.0	11.5	1062442
	ARPT061-00*-1*		45,500	33,800	13.0	11.5	872300
	ARUF061-00*-1*		45,500	33,800	13.0	11.5	872276
	ARUF486016A*		46,000	34,000	13.0	11.5	1038161
	ARUF48601A*		45,500	33,800	13.0	11.5	872232
	ARUF48601B*		45,500	33,800	13.0	11.5	1062443
	ASPF426016A*		45,500	33,800	14.0	12.2	1291675
	CA*F061*2*+EEP		45,500	33,700	13.0	11.5	869474
	CA*F4860*6A*+EEP		45,500	33,700	13.0	11.5	869464
	CA*F4860*6B*+EEP		45,500	33,700	13.0	11.5	1347074
	CHPF060D2*+EEP		45,500	33,700	13.0	11.5	869467
	CHPF4860D6A*+EEP		45,500	33,700	13.0	11.5	869465
	CHPF4860D6C*+EEP		45,500	33,700	13.0	11.5	1330583
	CSCF4860N6A*+EEP		45,500	33,700	13.0	11.5	869454
	CSCF4860N6C*+EEP		45,500	33,800	13.0	11.5	1296770
	H61F+EEP		45,500	33,700	13.0	11.5	869461
GSC13 0601B*	ADPF486016A*		57,000	41,200	13.0	11.5	1038132
	ADPF48601A*		57,000	41,200	13.0	11.5	734731
	ADPF48601B*		57,000	41,200	13.0	11.5	1062423
	AEPF426016A*		57,000	41,200	13.5	11.9	1038133
	AEPF426016B*		57,000	41,200	13.5	11.9	1277820
	AEPF42601A*		57,000	41,200	13.5	11.9	734754
	AEPT060-00*-1*		57,000	41,200	13.5	11.9	734686
	ARPF060-00B-1*		57,000	41,200	13.0	11.5	734901
	ARPF486016A*		57,000	41,200	13.0	11.5	1038134
	ARPF48601A*		57,000	41,200	13.0	11.5	734820
	ARPF48601B*		57,000	41,200	13.0	11.5	1062425

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

See Notes on Page 19.

**PRODUCT SPECIFICATIONS**

**PERFORMANCE RATINGS (CONT.)**

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0601B* (cont.)	ARPT061-00*-1*		57,000	41,200	13.0	11.5	734745
	ARUF061-00*-1*		57,000	41,200	13.0	11.5	734723
	ARUF486016A*		57,000	41,200	13.0	11.5	1038135
	ARUF48601A*		57,000	41,200	13.0	11.5	734858
	ARUF48601B*		57,000	41,200	13.0	11.5	1062426
	ASPF426016A*		57,000	41,200	13.5	11.9	1291676
	ASPF426016A*+TXV		57,000	41,200	14.0	12.2	1293240
	CA*F061*2*	G*V80905C**	57,000	41,200	13.3	11.7	734673
	CA*F061*2*	G*V81155C**	57,000	41,200	13.3	11.7	734852
	CA*F061*2*	G*V90905D**	57,000	41,200	13.3	11.7	734874
	CA*F061*2*+EEP		57,000	41,200	13.0	11.5	734866
	CA*F061*2*	MBE2000	57,000	41,200	13.5	11.8	734849
	CA*F4860*6A*	G*V80905C**	57,000	41,200	13.3	11.7	734755
	CA*F4860*6A*	G*V81155C**	57,000	41,200	13.3	11.7	734710
	CA*F4860*6A*	G*V90905D**	57,000	41,200	13.3	11.7	734685
	CA*F4860*6A*+EEP		57,000	41,200	13.0	11.5	734741
	CA*F4860*6A*	MBE2000	57,000	41,200	13.5	11.8	734658
	CA*F4860*6B*	G*V81155C**	57,000	41,200	13.3	11.7	1346570
	CA*F4860*6B*	G*V90905D**	57,000	41,200	13.3	11.7	1346569
	CA*F4860*6B*	G*V90905D**	57,000	41,200	13.3	11.7	1346571
	CA*F4860*6B*+EEP		57,000	41,200	13.0	11.5	1347075
	CA*F4860*6B*	MBE2000**-1	57,000	41,200	13.5	11.8	1346572
	CHPF060D2*	G*V80905C**	57,000	41,200	13.3	11.7	734847
	CHPF060D2*	G*V81155C**	57,000	41,200	13.3	11.7	734766
	CHPF060D2*	G*V90905D**	57,000	41,200	13.3	11.7	734706
	CHPF060D2*+EEP		57,000	41,200	13.0	11.5	734709
	CHPF4860D6A*	G*V80905C**	57,000	41,200	13.3	11.7	734790
	CHPF4860D6A*	G*V81155C**	57,000	41,200	13.3	11.7	734662
	CHPF4860D6A*	G*V90905D**	57,000	41,200	13.3	11.7	734832
	CHPF4860D6A*+EEP		57,000	41,200	13.0	11.5	734701
	CHPF4860D6A*	MBE2000**-1	57,000	41,200	13.5	11.7	1088820
	CHPF4860D6C*	G*V81155C**	57,000	41,200	13.3	11.7	1330585
	CHPF4860D6C*	G*V90905D**	57,000	41,200	13.3	11.7	1330586
	CHPF4860D6C*	G*V90905D**	57,000	41,200	13.3	11.7	1330584
	CHPF4860D6C*+EEP		57,000	41,200	13.0	11.5	1330587
	CHPF4860D6C*	MBE2000**-1	57,000	41,200	13.5	11.7	1347560
	CSCF4860N6A*	G*V80905C**	56,000	40,400	13.3	11.7	734770
	CSCF4860N6A*	G*V81155C**	56,000	40,400	13.3	11.7	734674
	CSCF4860N6A*	G*V90905D**	56,000	40,400	13.3	11.7	735964
	CSCF4860N6A*+EEP		56,000	40,400	13.0	11.5	734860
	CSCF4860N6C*	G*V80905C**	56,000	40,400	13.3	11.7	1296771
	CSCF4860N6C*	G*V81155C**	56,000	40,400	13.3	11.7	1296772
	CSCF4860N6C*	G*V90905D**	56,000	40,400	13.3	11.7	1296773
	CSCF4860N6C*+EEP		56,000	40,400	13.0	11.5	1296774
	H61F	G*V80905C**	56,000	40,400	13.3	11.7	734752
	H61F	G*V81155C**	56,000	40,400	13.3	11.7	734882
	H61F	G*V90905D**	56,000	40,400	13.3	11.7	734805
	H61F+EEP		56,000	40,400	13.0	11.5	734711

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER <sup>1</sup>	EER <sup>2</sup>	
GSC13 0603A*	ADPF486016A*		57,000	41,000	13.0	11.5	1038160
	ADPF48601A*		57,000	41,000	13.0	11.5	872325
	ADPF48601B*		57,000	41,000	13.0	11.5	1062427
	ARPF060-00B-1*		57,000	41,000	13.0	11.5	872227
	ARPF486016A*		57,000	41,000	13.0	11.5	1038159
	ARPF48601A*		57,000	41,000	13.0	11.5	872404
	ARPF48601B*		57,000	41,000	13.0	11.5	1062428
	ARPT061-00*-1*		57,000	41,000	13.0	11.5	872358
	ARUF061-00*-1*		57,000	41,000	13.0	11.5	872297
	ARUF486016A*		57,000	41,000	13.0	11.5	1038158
	ARUF48601A*		57,000	41,000	13.0	11.5	872380
	ARUF48601B*		57,000	41,000	13.0	11.5	1062429
	ASPF426016A*		57,000	41,000	13.5	11.9	1293241
	CA*F061*2*+EEP		57,000	41,000	13.0	11.5	869444
	CA*F4860*6A*+EEP		57,000	41,000	13.0	11.5	869460
	CA*F4860*6B*+EEP		57,000	41,000	13.0	11.5	1347076
	CHPF060D2*+EEP		57,000	41,000	13.0	11.5	869473
	CHPF4860D6A*+EEP		57,000	41,000	13.0	11.5	869471
	CHPF4860D6C*+EEP		57,000	41,000	13.0	11.5	1330588
	CSCF4860N6A*+EEP		56,000	40,300	13.0	11.5	869449
CSCF4860N6C*+EEP		56,000	40,300	13.0	11.5	1296775	
H61F+EEP		56,000	40,300	13.0	11.5	869430	
GSC13 0604A*	ADPF486016A*		57,000	41,000	13.0	11.5	1038157
	ADPF48601A*		57,000	41,000	13.0	11.5	872286
	ADPF48601B*		57,000	41,000	13.0	11.5	1062444
	ARPF060-00B-1*		57,000	41,000	13.0	11.5	872245
	ARPF486016A*		57,000	41,000	13.0	11.5	1038156
	ARPF48601A*		57,000	41,000	13.0	11.5	872248
	ARPF48601B*		57,000	41,000	13.0	11.5	1062445
	ARPT061-00*-1*		57,000	41,000	13.0	11.5	872250
	ARUF061-00*-1*		57,000	41,000	13.0	11.5	872389
	ARUF486016A*		57,000	41,000	13.0	11.5	1038155
	ARUF48601A*		57,000	41,000	13.0	11.5	872236
	ARUF48601B*		57,000	41,000	13.0	11.5	1062439
	ASPF426016A*		57,000	41,000	13.5	11.9	1293245
	CA*F061*2*+EEP		57,000	41,000	13.0	11.5	869432
	CA*F4860*6A*+EEP		57,000	41,000	13.0	11.5	869475
	CA*F4860*6B*+EEP		57,000	41,000	13.0	11.5	1347077
	CHPF060D2*+EEP		57,000	41,000	13.0	11.5	869448
	CHPF4860D6A*+EEP		57,000	41,000	13.0	11.5	869437
	CHPF4860D6C*+EEP		57,000	41,000	13.0	11.5	1330589
	CSCF4860N6A*+EEP		56,000	40,300	13.0	11.5	869470
CSCF4860N6C*+EEP		56,000	40,300	13.0	11.5	1296776	
H61F+EEP		56,000	40,300	13.0	11.5	869459	

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

**Notes:**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP: Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

**ACCESSORIES**

Model	Description	GSC13 018	GSC13 024	GSC13 030	GSC13 036	GSC13 042	GSC13 048	GSC13 060
ABK-20	Anchor Bracket Kit ▼	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A	Freeze Protection Kit <sup>1</sup>	X	X	X	X	X	X	X
LSK01A	Liquid Line Solenoid Kit <sup>2</sup>	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat	X	X	X	X	X	X	X
TX3N2 <sup>2</sup>	TXV Kit	X	X	X	X			
TX5N2 <sup>2</sup>	TXV Kit					X	X	X

▼ Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.



*Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.*

Copyright © 2007 • Goodman Manufacturing Company, L.P. • Houston, Texas • Printed in the USA.