



Air Conditioning & Heating



COOLING CAPACITY
24,000 BTU/H TO 57,000 BTU/H

PRODUCT SPECIFICATIONS



SSX16

16 SEER / R-410A

2- TO 5-TON, HIGH-EFFICIENCY SPLIT SYSTEM AIR CONDITIONER



The Goodman® SSX16 Air Conditioner uses the environmentally friendly refrigerant R-410A, which is chlorine-free to help prevent damage to the ozone layer. This unit features a high-efficiency Copeland® scroll compressor plus energy efficiencies and operating sound levels that are among the best in the heating and cooling industry. The SSX16 is designed for the consumer who desires superior comfort, quiet operation, and environmentally friendly performance.

Standard Features

- R-410A environmentally friendly refrigerant
- High-efficiency Copeland® scroll compressor
Single-Stage — 2 through 4 tons
Two-Stage — 5 tons
- High-quality compressor sound blanket
- High-pressure switch; low-pressure switch
- Factory-installed filter dryer
- 850-RPM condenser fan motor
- Copper tube/enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- Ground lug connection
- ARI Certified; ETL Listed

Cabinet Features

- Unique Goodman® sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side compressor and tubing access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets 2001 Florida Building Code unit integrity requirements for hurricane-type winds


Accessories

- See Page 7 for a list of accessories.




PRODUCT SPECIFICATIONS

NOMENCLATURE

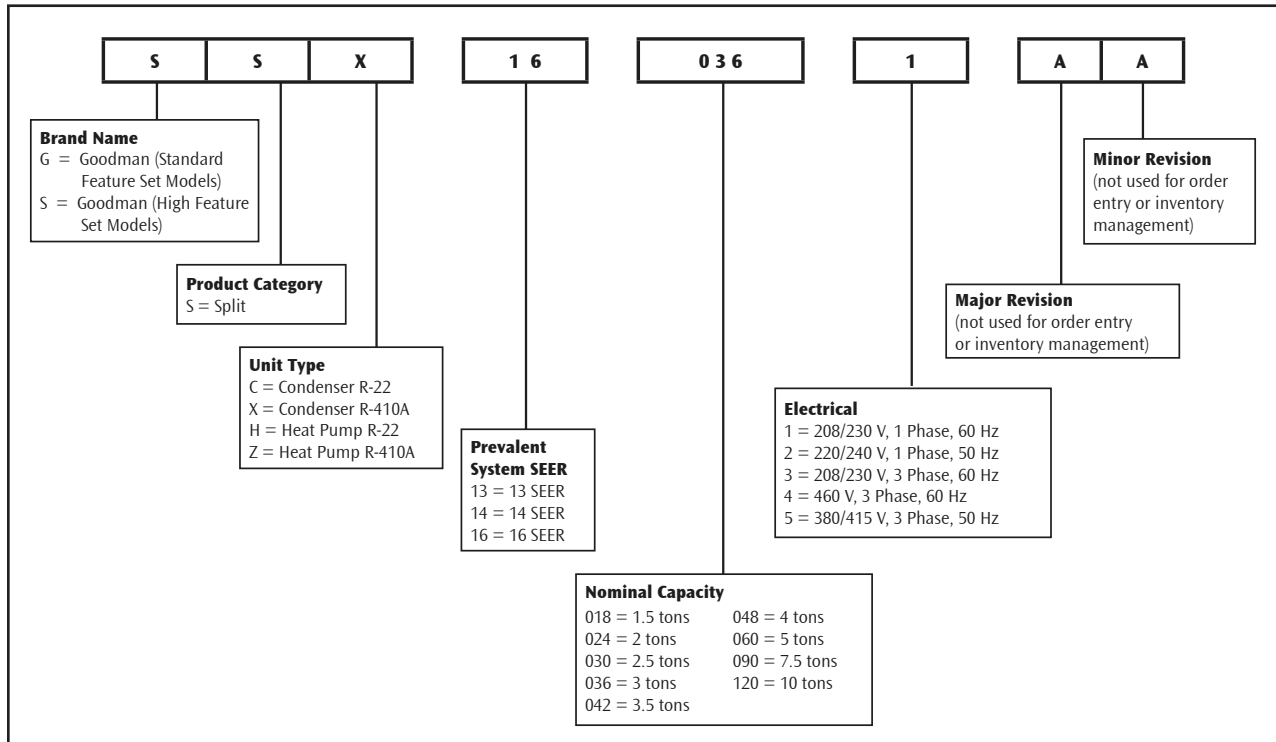

DIMENSIONS

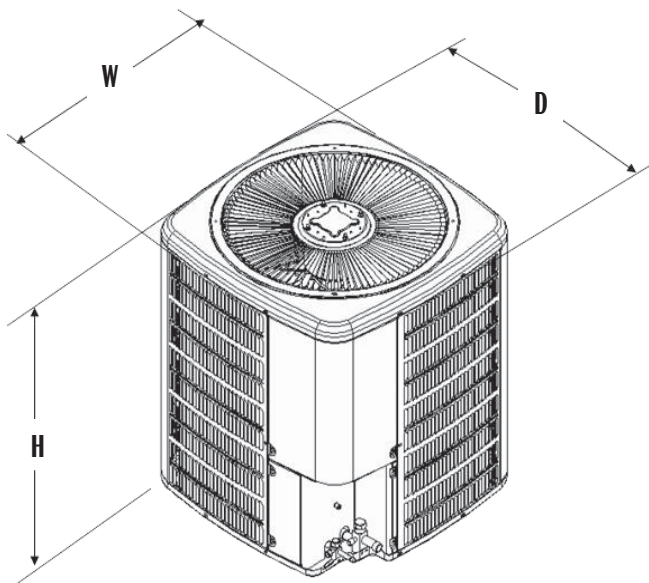

Model	Dimensions
SSX160241A*	29x29x38¼
SSX160361A*	29x29x38¼
SSX160481A*	35½x35½x38¼
SSX160601A*	35½x35½x38¼

SPECIFICATIONS

	SSX16 0241A*	SSX16 0361A*	SSX16 0481A*	SSX16 0601A*
Cooling Capacity				
Nominal Cooling (BTU/h)	24,000	36,000	48,000	60,000
Decibels	73.5	73.5	73.5	73.5
Compressor				
RLA	13.4	14.1	19.8	25.6
LRA	58.3	77	109	118
Condenser Fan Motor				
Horsepower (RPM)	1/12	1/6	1/6	1/6
FLA	0.60	1.10	1.10	1.00
Refrigeration System				
Refrigerant Line Size¹				
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	7/8"	1 1/8"	1 1/8"
Refrigerant Connection Size				
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	165	160	250	200
Electrical Data				
Voltage-Hz / Phase	208/230-60-1			
Minimum Circuit Ampacity ²	17.4	18.7	25.9	33.0
Max. Overcurrent Protection ³	30	30	40	50
Min / Max Volts	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Ship Weight (lbs)	282	282	282	296

¹ Tested and rated in accordance with ARI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Notes

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

Important EnergyStar Notice: Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit www.energystar.gov.

PERFORMANCE RATINGS

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER ¹	EER ²	
SSX16 0241A*	AEPF303616B*+TXV		24,000	18,200	16.00	13.50	1285143
	AEPF30361A*+TXV		24,000	18,200	16.00	13.50	1047150
	AR*F18241**+TXV		24,000	18,200	15.00	12.50	1347367
	ASPF303616A*+TXV		24,000	18,200	16.00	13.00	1291791
	CA*F048*4*+TXV	MBE1600**-1	24,000	18,200	16.00	13.50	1047139
	CA*F048*4*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047145
	CA*F048*4*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047141
	CA*F060*4*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047147
	CA*F060*4*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1047149
	CA*F060*4*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047143
	CA*F3636*6A*+TXV	MBE1600**-1	24,000	18,200	16.00	13.50	1047138
	CA*F3636*6A*+TXV	G*E80704B**	24,000	18,200	16.00	13.50	1293959
	CA*F3636*6A*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047144
	CA*F3636*6A*+TXV	G*V90704C**	23,600	17,900	16.00	13.50	1345808
	CA*F3636*6A*+TXV	G*V950453B**	24,000	18,200	16.00	13.50	1289431
	CA*F3636*6A*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047140
	CA*F3636*6A*+TXV		22,600	17,200	15.00	12.50	1289059
	CA*F3636*6B*+EEP+TXV		22,600	17,200	15.00	12.50	1346667
	CA*F3636*6B*+TXV	MBE1600**-1	24,000	18,200	16.00	13.50	1346661
	CA*F3636*6B*+TXV	G*E80704B**	24,000	18,200	16.00	13.50	1346662
	CA*F3636*6B*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1346663
	CA*F3636*6B*+TXV	G*V90704C**	23,600	17,900	16.00	13.50	1346664
	CA*F3636*6B*+TXV	G*V950453B**	24,000	18,200	16.00	13.50	1346665
	CA*F3636*6B*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1346666
	CA*F3642*6A*+TXV	A*V80905C**	24,000	18,200	16.00	13.50	1293960
	CA*F3642*6A*+TXV	A/G*V80704B**	24,000	18,200	15.50	13.00	1293961
	CA*F3642*6A*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047146
	CA*F3642*6A*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1047148
	CA*F3642*6A*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047142
	CA*F3642*6A*+TXV	G*V950905D**	24,000	18,200	16.00	13.50	1293962
	CA*F3642*6B*+TXV	A*V80905C**	24,000	18,200	16.00	13.50	1346668
	CA*F3642*6B*+TXV	A/G*V80704B**	24,000	18,200	15.50	13.00	1346669
	CA*F3642*6B*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1346670
	CA*F3642*6B*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1346671
	CA*F3642*6B*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1346672
	CA*F3642*6B*+TXV	G*V950905D**	24,000	18,200	16.00	13.50	1346673
CHPF048*4*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047154	
CHPF048*4*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1047156	
CHPF048*4*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047152	

¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

Notes:

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER ¹	EER ²	
SSX16 0241A* (cont.)	CHPF3636B6A*+EEP+TXV		23,000	17,500	14.00	11.50	1328879
	CHPF3636B6A*+EEP+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047164
	CHPF3636B6A*+EEP+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1047165
	CHPF3636B6A*+EEP+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047163
	CHPF3636B6A*+TXV	G*E80704B**	24,600	18,700	16.00	13.50	1346389
	CHPF3636B6B*+EEP+TXV		23,000	17,500	14.00	11.50	1347392
	CHPF3636B6B*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1330680
	CHPF3636B6B*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1330681
	CHPF3636B6B*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1330682
	CHPF3642*6A*+TXV	A/G*V80905C**	24,000	18,200	16.00	13.00	1088629
	CHPF3642*6A*+TXV	A/G*V81155C**	24,000	18,200	16.00	13.00	1088630
	CHPF3642*6A*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047153
	CHPF3642*6A*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1047155
	CHPF3642*6A*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047151
	CHPF3642C6A*+TXV	A/G*V80704B**	24,000	18,200	15.50	13.00	1293963
	CHPF3642C6B*+TXV	A/G*V80704B**	24,000	18,200	15.50	13.00	1347393
	CHPF3642C6B*+TXV	A/G*V80905C**	24,000	18,200	16.00	13.50	1330532
	CHPF3642C6B*+TXV	A/G*V81155C**	24,000	18,200	16.00	13.50	1330533
	CHPF3642C6B*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1330685
	CHPF3642D6B*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1330683
	CHPF3642D6B*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1330684
	CHPF3743C6A*+TXV	A/G*V80704B**	24,000	18,200	15.50	13.00	1347608
	CSCF3642N6A*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047159
	CSCF3642N6A*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1047161
	CSCF3642N6A*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047157
	CSCF3642N6C*+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1296700
	CSCF3642N6C*+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1296701
	CSCF3642N6C*+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1296702
	H60F+TXV	G*V80905C**	24,000	18,200	16.00	13.50	1047160
	H60F+TXV	G*V81155C**	24,000	18,200	16.00	13.50	1047162
	H60F+TXV	G*V950704C**	24,000	18,200	16.00	13.50	1047158
	SSX16 0361A*	AEPF426016A*+TXV		34,600	27,300	16.00	13.20
AEPF426016B*+TXV			34,600	27,300	16.00	13.20	1277837
ARUF193116A*+TXV			34,400	27,200	14.00	12.00	1347370
ASPF426016A*+TXV			34,600	27,300	16.00	13.00	1291792
CA*F4860*6A*+TXV		MBE1600**-1	34,000	26,900	16.00	13.00	1047167
CA*F4860*6A*+TXV		MBE2000**-1	35,000	27,700	16.00	13.50	1047180
CA*F4860*6A*+TXV		A/G*E80704B**	34,400	27,200	15.50	13.00	1293964
CA*F4860*6A*+TXV		A/G*V80704B**	35,000	27,700	15.50	12.50	1293969
CA*F4860*6A*+TXV		A/G*V80905C**	35,000	27,700	15.50	13.00	1293965
CA*F4860*6A*+TXV		G*E80704B**	35,000	27,700	15.50	13.00	1293966
CA*F4860*6A*+TXV		G*E80905C**	35,000	27,700	16.00	13.50	1293967
CA*F4860*6A*+TXV		G*E81155C**	35,000	27,700	16.00	13.50	1293968
CA*F4860*6A*+TXV		G*V90704C**	35,200	27,800	16.00	13.50	1346393
CA*F4860*6A*+TXV		G*V90905D**	34,800	27,500	16.00	13.50	1346395
CA*F4860*6A*+TXV		G*V950704C**	34,000	26,900	15.50	13.00	1328888
CA*F4860*6A*+TXV		G*V950905D**	35,000	27,700	16.00	13.50	1047166

PRODUCT SPECIFICATIONS

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER ¹	EER ²	
SSX16 0361A* (cont.)	CA*F4860*6A*+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1047168
	CA*F4860*6A*+TXV		34,000	26,900	14.00	12.00	1289060
	CA*F4860*6B*+TXV	MBE1600**-1	34,000	26,900	16.00	13.00	1347171
	CA*F4860*6B*+TXV	MBE2000**-1*	35,000	27,700	16.00	13.50	1346674
	CA*F4860*6B*+TXV		34,000	26,900	14.00	12.00	1347151
	CA*F4860*6B*+TXV	A/G*E80704B**	34,400	27,200	15.50	13.00	1347142
	CA*F4860*6B*+TXV	A/G*V80704B**	35,000	27,700	15.50	12.50	1347143
	CA*F4860*6B*+TXV	A/G*V80905C**	35,000	27,700	15.50	13.00	1347144
	CA*F4860*6B*+TXV	G*E80704B**	35,000	27,700	15.50	13.00	1347145
	CA*F4860*6B*+TXV	G*E80905C**	35,000	27,700	16.00	13.50	1347146
	CA*F4860*6B*+TXV	G*E81155C**	35,000	27,700	16.00	13.50	1347147
	CA*F4860*6B*+TXV	G*V950704C**	34,000	26,900	15.50	13.00	1347148
	CA*F4860*6B*+TXV	G*V950905D**	35,000	27,700	16.00	13.50	1347149
	CA*F4860*6B*+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1347150
	CHPF060D4*+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1047170
	CHPF4860*6A*+TXV	MBE2000**-1*	35,000	27,700	16.00	13.50	1047178
	CHPF4860D6A*+EEP+TXV		34,000	26,900	14.00	12.00	1328890
	CHPF4860D6A*+TXV	A/G*V80704B**	34,400	27,200	15.50	13.00	1328889
	CHPF4860D6A*+TXV	A/G*V8095C**	34,600	27,300	15.50	12.50	1088632
	CHPF4860D6A*+TXV	A/G*V81155C**	34,600	27,300	15.50	12.50	1088631
	CHPF4860D6A*+TXV	G*E80905C**	34,600	27,300	15.50	12.50	1277924
	CHPF4860D6A*+TXV	G*E81155C**	34,600	27,300	15.50	12.50	1260277
	CHPF4860D6A*+TXV	G*V80704B**	34,600	27,300	16.00	13.20	1346391
	CHPF4860D6A*+TXV	G*V950704C**	34,400	27,200	15.50	13.00	1293977
	CHPF4860D6A*+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1047169
	CHPF4860D6C*+EEP+TXV		34,000	26,900	14.00	12.00	1347561
	CHPF4860D6C*+TXV	MBE2000**-1A*	35,000	27,700	16.00	13.50	1330686
	CHPF4860D6C*+TXV	A/G*V80704B**	34,400	27,200	15.50	13.00	1347574
	CHPF4860D6C*+TXV	A/G*V8095C**	34,600	27,300	15.50	12.50	1330534
	CHPF4860D6C*+TXV	A/G*V81155C**	34,600	27,300	15.50	12.50	1330535
	CHPF4860D6C*+TXV	G*E80905C**	34,600	27,300	15.50	12.50	1347572
	CHPF4860D6C*+TXV	G*E81155C**	34,600	27,300	15.50	12.50	1347571
	CHPF4860D6C*+TXV	G*V950704C**	34,400	27,200	15.50	13.00	1347573
	CHPF4860D6C*+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1330687
	CSCF4860N6A*+TXV	G*E80704B**	34,600	27,300	15.50	12.50	1293978
	CSCF4860N6A*+TXV	G*V80905C**	35,000	27,700	16.00	13.50	1293979
	CSCF4860N6A*+TXV	G*V950905D**	35,000	27,700	16.00	13.50	1047171
	CSCF4860N6A*+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1047173
	CSCF4860N6C*+TXV	G*E80704B**	34,600	27,300	15.50	12.50	1347348
	CSCF4860N6C*+TXV	G*V80905C**	35,000	27,700	16.00	13.50	1347349
	CSCF4860N6C*+TXV	G*V950905D**	35,000	27,700	16.00	13.50	1296844
	CSCF4860N6C*+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1296845
H61F+TXV	G*V950905D**	35,000	27,700	16.00	13.50	1047172	
H61F+TXV	G*V951155D**	35,000	27,700	16.00	13.50	1047174	

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER	EER	
SSX16 0481A*	AEPF426016A*+TXV		46,000	34,500	16.00	13.00	1047181
	AEPF426016B*+TXV		46,000	34,500	16.00	13.00	1277838
	AR*F364216A*+TXV		45,500	34,100	14.50	11.50	1347371
	ASPF426016A*+TXV		46,000	34,500	15.50	12.50	1291793
	CA*F4860*6A*+EEP+TXV		45,500	34,100	14.50	11.50	1296159
	CA*F4860*6A*+TXV	MBE2000**-1	47,000	35,300	16.00	13.00	1047193
	CA*F4860*6A*+TXV	A/G*V80905C**	46,500	34,900	15.50	12.50	1293990
	CA*F4860*6A*+TXV	A/G*V81155C**	46,000	34,500	15.50	12.50	1293991
	CA*F4860*6A*+TXV	G*E80905C**	46,500	34,900	15.50	12.50	1293988
	CA*F4860*6A*+TXV	G*E81155C**	47,000	35,300	15.50	12.50	1293989
	CA*F4860*6A*+TXV	G*V90905D**	46,500	34,900	16.00	13.00	1346399
	CA*F4860*6A*+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1047183
	CA*F4860*6A*+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1047182
	CA*F4860*6B*+EEP+TXV		45,500	34,100	14.50	11.50	1347152
	CA*F4860*6B*+TXV	MBE2000**-1	47,000	35,300	16.00	13.00	1346675
	CA*F4860*6B*+TXV	A/G*V80905C**	46,500	34,900	15.50	12.50	1347153
	CA*F4860*6B*+TXV	A/G*V81155C**	46,000	34,500	15.50	12.50	1347154
	CA*F4860*6B*+TXV	G*E80905C**	46,500	34,900	15.50	12.50	1347155
	CA*F4860*6B*+TXV	G*E81155C**	47,000	35,300	15.50	12.50	1347156
	CA*F4860*6B*+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1347157
	CA*F4860*6B*+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1347158
	CHPF060D4*+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1047186
	CHPF060D4*+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1047188
	CHPF4860*6A*+TXV	MBE2000**-1	47,000	35,300	16.00	13.20	1047184
	CHPF4860*6A*+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1047185
	CHPF4860*6A*+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1047187
	CHPF4860*6A*+TXV		45,500	34,100	14.50	12.20	1289415
	CHPF4860D6A*+EEP+TXV		46,000	34,500	15.00	12.00	1293987
	CHPF4860D6A*+TXV	A/G*V8095C**	46,000	34,500	15.50	12.50	1088635
	CHPF4860D6A*+TXV	A/G*V81155C**	46,000	34,500	15.50	12.50	1088634
	CHPF4860D6A*+TXV	G*E8095C**	46,000	34,500	15.50	12.50	1260524
	CHPF4860D6A*+TXV	G*E81155C**	46,000	34,500	15.50	12.50	1260278
	CHPF4860D6A*+TXV	G*V950704C**	46,000	34,500	15.50	12.50	1293992
	CHPF4860D6C*+EEP+TXV		46,000	34,500	15.00	12.00	1347562
	CHPF4860D6C*+TXV	MBE2000**-1A*	47,000	35,300	16.00	13.20	1330688
	CHPF4860D6C*+TXV	A/G*V80905C**	46,000	34,500	15.50	12.50	1330538
	CHPF4860D6C*+TXV	A/G*V81155C**	46,000	34,500	15.50	12.50	1330539
	CHPF4860D6C*+TXV	G*E8095C**	46,000	34,500	15.50	12.50	1347576
	CHPF4860D6C*+TXV	G*E81155C**	46,000	34,500	15.50	12.50	1347575
	CHPF4860D6C*+TXV	G*V950704C**	46,000	34,500	15.50	12.50	1347577
	CHPF4860D6C*+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1330536
	CHPF4860D6C*+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1330537
	CSCF4860N6A*+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1047189
	CSCF4860N6A*+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1047191
	CSCF4860N6C*+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1296846
	CSCF4860N6C*+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1296847
H61F+TXV	G*V950905D**	46,000	34,500	16.00	13.00	1047190	
H61F+TXV	G*V951155D**	46,000	34,500	16.00	13.00	1047192	

¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F See Notes on Page 4.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				ARI #
	Indoor Coil	Furnace/ Blower	Total	Sensible	SEER	EER	
SSX16 0601A*	AEPF426016A*+TXV		57,000	42,800	15.50	12.00	1047211
	AEPF426016B*+TXV		57,000	42,800	15.50	12.00	1277839
	CA*F4860*6A*+TXV	MBE2000**-1*	57,000	42,800	16.00	12.00	1047196
	CA*F4860*6A*+TXV	A/G*V80905C**	57,000	42,800	15.00	11.00	1328891
	CA*F4860*6A*+TXV	G*V90905C**	56,000	42,000	15.50	12.00	1346403
	CA*F4860*6A*+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1076525
	CA*F4860*6A*+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1047198
	CA*F4860*6B*+TXV	MBE2000**-1*	57,000	42,800	16.00	12.00	1346676
	CA*F4860*6B*+TXV	A/G*V80905C**	57,000	42,800	15.00	11.00	1347159
	CA*F4860*6B*+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1347160
	CA*F4860*6B*+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1347161
	CHPF060D4*+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1047201
	CHPF060D4*+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1047203
	CHPF4860*6A*+TXV	MBE2000**-1*	57,000	42,800	15.50	11.50	1047199
	CHPF4860*6A*+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1047200
	CHPF4860*6A*+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1047202
	CHPF4860D6A*+TXV	A/G*V80905C**	56,000	42,000	15.50	12.00	1088637
	CHPF4860D6A*+TXV	A/G*V81155C**	56,000	42,000	15.50	12.00	1088636
	CHPF4860D6A*+TXV	G*V90905D**	55,500	41,600	16.00	12.00	1346404
	CHPF4860D6C*+TXV	MBE2000**-1A*	57,000	42,800	15.50	11.50	1330689
	CHPF4860D6C*+TXV	A/G*V80905C**	56,000	42,000	15.50	12.00	1330540
	CHPF4860D6C*+TXV	A/G*V81155C**	56,000	42,000	15.50	12.00	1330541
	CHPF4860D6C*+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1330690
	CHPF4860D6C*+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1330691
	CSCF4860N6A*+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1047204
	CSCF4860N6A*+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1047206
	CSCF4860N6C*+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1296848
	CSCF4860N6C*+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1296849
	H61F+TXV	G*V950905D**	57,000	42,800	15.50	11.50	1047205
	H61F+TXV	G*V951155D**	57,000	42,800	15.50	11.50	1047207

ACCESSORIES

Model	Description	SSX16024*	SSX16036*	SSX16048*	SSX16060*
ABK-20	Anchor Bracket Kit ◀	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X
CSR-U-1	Hard-start Kit	X	X		
CSR-U-2	Hard-start Kit		X	X	X
CSR-U-3	Hard-start Kit			X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X
OT18-60A	Outdoor Thermostat / Lockout Stat	X	X	X	X
TX2N4 ²	TXV Kit	X			
TX3N4 ²	TXV Kit		X		
TX5N4 ²	TXV Kit			X	X

◀ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device.



Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Copyright © 2007 • Goodman Manufacturing Company, L.P. • Houston, Texas
Printed in the USA.